


HCUS-400 Ultrasonic Level Transmitter-Standard



BlueLevel
by HCCK
HUICHUANKEKONG

Application :	Solids,Liquids
Measuring Range :	0 ~ 30m
Connection Process :	Thread
Process Pressure :	≤0.3MPa
Accuracy :	0.5%-1.0%
Protection Grade :	Display Meter IP66/Probe IP68
Signal Output :	(4-20)mA/RS485Modbus

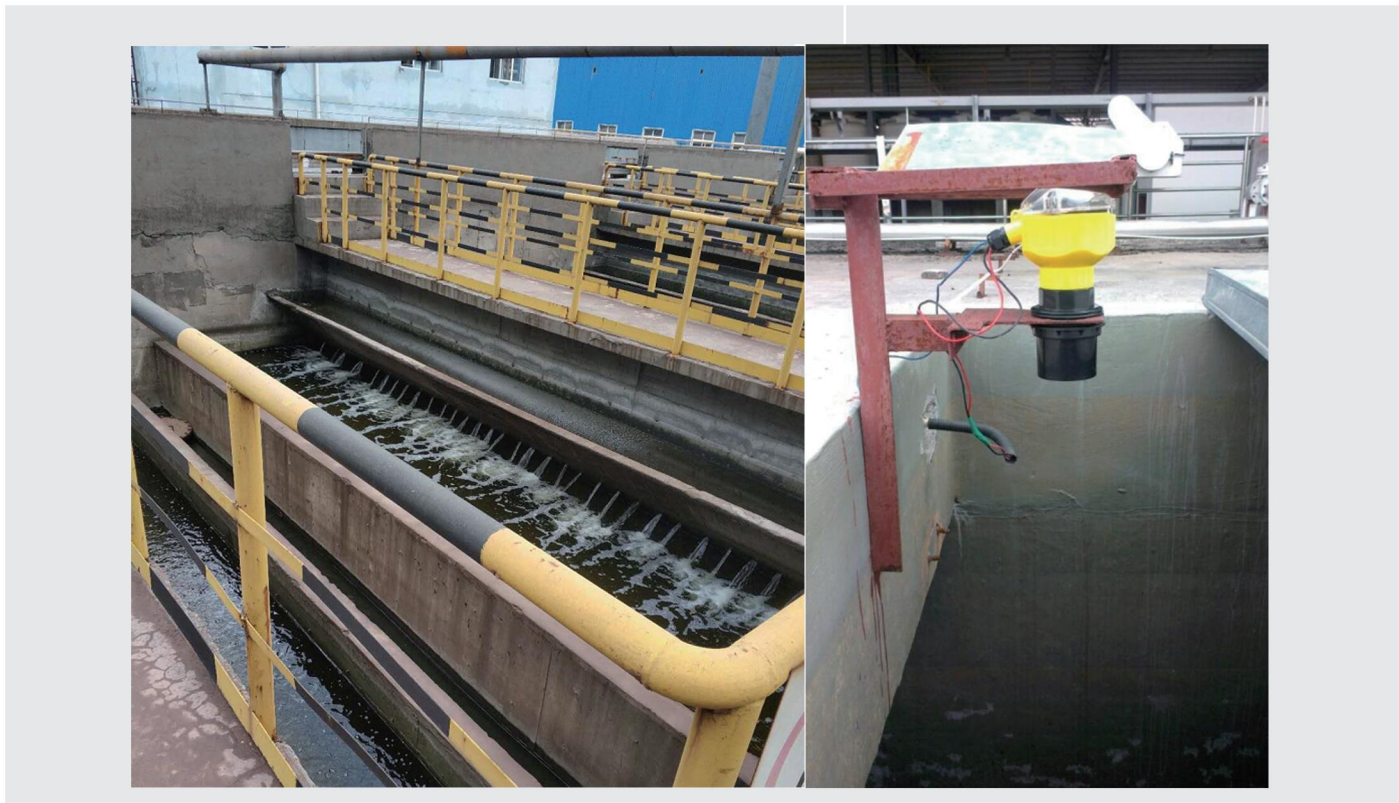

Type	Code	Parameters				
Sensor Type	P	Standard		T	Anti-Corrosion Type	
	L	Die-Casting Aluminium With Epoxy Coating/IP67				
Housing/ Protection Grade	G	Die-Casting Aluminium With Epoxy Coating、Dual Chamber/IP67				
	S	Plastic Shell/IP66				
Probe Mounting Size	G	Thread G1½,Rated Range 5m				
	H	Thread G2,Rated Range 10m				
	J	Thread M78*2,Rated Range 15m				
	K	Thread M78*2,Rated Range 20m				
	L	Thread G3,Rated Range 30m				
	Y	Special Custom				
Power Supply	1	220V AC	2	24V DC	3	12V
Electronic Unit	I	Two-Wire System (Without Relay Output)				
	K	Four-Wire				
	M	Communication (MODBUS-RTU)				
Relay Output	R	No Relay Output				
	R1	One Relay				
	R2	Two Relay				
Electrical Interface	M	Cable Waterproof Joint(Die-Casting Aluminium Shell)				
	N	Cable Waterproof Joint(Plastic Shell)				
Range	XXX	User Specified Unit : m				
Special Custom	X	Special Custom				

Note: Die-Cast Aluminum Enclosure Limited (4-20) mA Or 485 Communication Only.